



Order Code

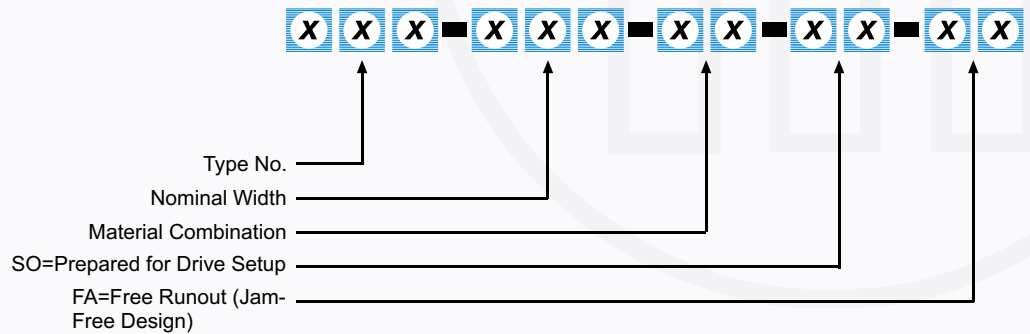


Table of Material Combinations

No.	Body+Flanges	Ball	Liners	O-rings
1	Gray Cast Iron	Gray Cast Iron ³	PTFE ¹	FPM
2	Gray Cast Iron	Gray Cast Iron ³	PTFE ²	Buna-N
3	Aluminium Alloy	Gray Cast Iron ³	PTFE ¹	FPM
4	Aluminium Alloy	Gray Cast Iron ³	PTFE ²	Buna-N
5	Aluminium Alloy	Aluminium Alloy	PTFE ²	Buna-N
6	Gray Cast Iron	Stainless Steel	PTFE ¹	FPM
7	Gray Cast Iron	Stainless Steel	PTFE ²	Buna-N
8	Aluminium Alloy	Stainless Steel	PTFE ¹	FPM
9	Aluminium Alloy	Stainless Steel	PTFE ²	Buna-N
10	Gray Cast Iron	Stainless Steel	Stainless Steel	FPM

1="Special casing" design with backup ring 2="O-ring spring mounted" design 3=Hard chrome plated

Example:

Metallic-sealed flange ball valve prepared for drive setup and free runout using DIN flanges (400 series) in nominal width 65: **400/65/10/SO/FA**

The PTFE/buna-N design is spring-mounted with an O-ring and particularly suitable for granular or powdered media. For use with high temperatures, this model is also available with FPM O-rings.

The stainless steel/FPM design is spring-mounted with an O-ring and particularly suitable for abrasive, granular and powdered media.

PROVEN & RELIABLE
FOR USE IN:

INDUSTRIAL

FUEL HANDLING

BULK HANDLING

TANK TRUCK CONSTR.

SILO TRUCK CONSTR.